


Lighted Wall Mirror Mounting & Wiring Instructions

Hardwire Models 903HW, 950HW, 933HW, 955HW, 951HW
952,

Kimball & Young recommends using a qualified electrician for all electrical wiring procedures. 110 VAC and electrical box must be installed at the desired location of wall mirror before continuing. Installation must include ground wire.

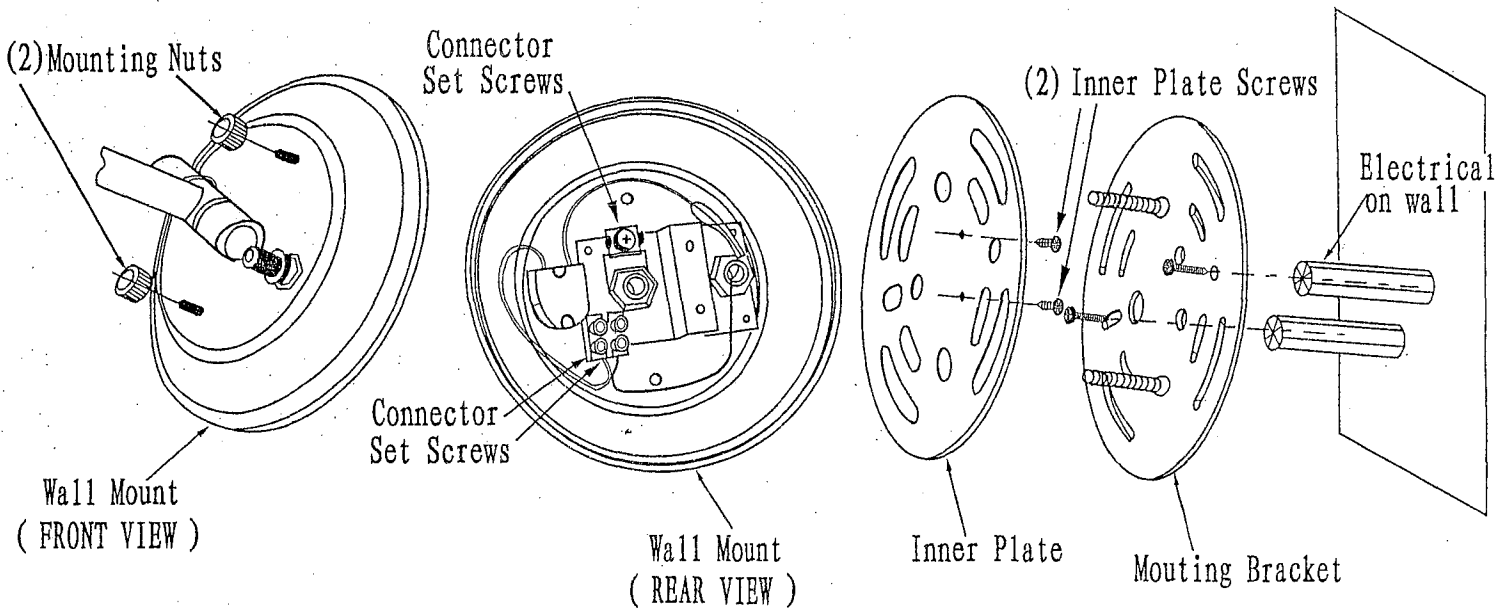

1. Remove Mounting Bracket From Wall Mount Assembly by removing two Mounting Nuts.
2. Remove Inner Plate by removing two Inner Plate Screws.
3. Feed electrical wire, with Ground wire, from Electrical Box, through Mounting Bracket, then through insulating gasket of the Inner Plate as shown.
4. On Wall Mount, connect white wire to white connector, and black wire to black connector by tightening each set screw.
5. Connect ground wire from wall to green set screw.
6. Reinstall Inner Plate on Wall Mount Assembly using two Inner Plate Screws.
7. Secure Mounting Bracket over Electrical Box on wall.
8. Install Mirror and Wall Mount Assembly over Mounting Bracket and secure using two Mounting Nuts.